




updated: 01-01-2026



ASS-SERIE
Hydraulic Scrap | Schrottscheren
for Excavators from 6 ~ 35 t | für Bagger 6 ~ 35 t

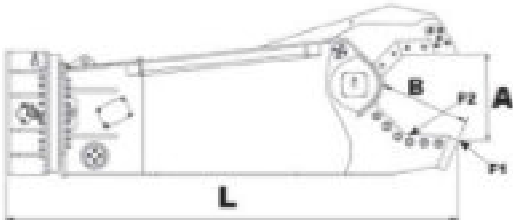

			A	B	L									
	1*)	2*)	-	-	-	6*)	7*)	8*)	9*)	10*)	11*)	12*)	13*)	14*)
	Kg	t	mm	mm	mm	kN	kN	°	l/min/max	bar/ min-max	l/min/max	bar	AC	
ASS-06	580	6-9	350	358	1990	510	920	360	20	100	120	245	AC08	M20
ASS-12	1180	12-25	420	480	2250	620	1430	360	30	120	140	350	AC09	M30
ASS-20	2150	20-35	510	540	2710	850	1480	360	30	120	250	350	AC09	M30
ASS-30	3100	25-35	600	630	3580	1175	2250	360	35	120	250	350	AC010	M30

1*) WEIGHT, without bracket / GEWICHT ohne Kopfplatte | 2*) APPLICABLE EXCAVATOR / GEEIGNETER BAGGER | 6*) PINCHING FORCE / KNEIFKRAFT | 7*) PINCHING FORCE / KNEIFKRAFT | 8*) ROTATION / ROTATION | 9*) Oil Flow Rotation / Ölfluss Rotation | 10*) Oil PRESSURE Rotation / Öldruck Rotation | 11*) WORKING OIL FLOW / ÖLFLUSS | 12*) SET PRESSURE / EINSTELLDRUCK | 13*) HOLE PATTERN / LOCHBILD | 14*) BOLT SIZE / SCHRAUBENGRÖSSE