



DEMAREC MULTI-SHEAR

DMS-05-C, DMS-05-S, DMS-05-V



IN THE END... IT'S ONLY ABOUT THE RIGHT TOOL

DEMAREC MULTI-SHEAR


The DEMAREC DMS Multi-shear is the ideal flexible shear for use with midi excavators and skid-steers. The DMS is a truly multifunctional shear thanks to the mechanical change system and the wide range of available jaws. There are jaws available for cutting through reinforced concrete (DMS-05-C), scrap (DMS-05-S), and for cutting cables (DMS-05-V). The DMS-05 can be used for both primary and secondary demolition work. All jaws are fitted with replaceable wear parts where possible. Jaws can be quickly and safely changed in just a few minutes.

Key features and benefits

- Multi-Link system for rapid jaw changing
- Powerful cylinder with speed valve
- Cylinder is reverse-mounted so that the piston rod is fully protected
- Compact 15 tons hydraulic 360° rotator
- Replaceable wear parts
- Perfect jaw geometry for optimum performance
- Hydraulic system completely protected by the yoke
- Optimum weight/power ratio



Jaws can be quickly and safely changed in just a few minutes.

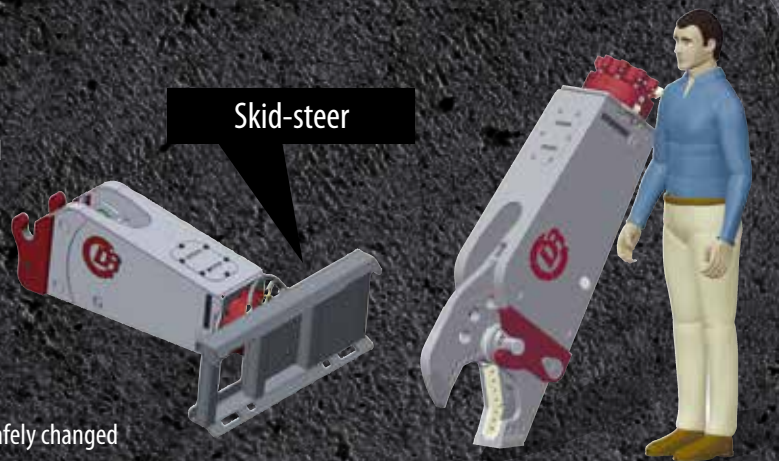

DMS-05-C



DMS-05-S



DMS-05-V

Technical specifications

Type		DMS-05-C	DMS-05-S	DMS-05-V
Carrier weight (Boom)*	ton	5 - 7	5 - 7	5 - 7
Carrier weight (Dipper)*	ton	7 - 9	7 - 9	7 - 9
Carrier weight (Skid-steer)*	ton	3 - 5	3 - 5	3 - 5
Weight (approx.)**	kg	540	510	500
Length	mm	1665	1665	1725
Jaw opening	mm	400	320	270
Depth of jaw	mm	360	360	355
Opening/Closing Pmax	bar	250	250	250
Flow	l/min	60 - 100	60 - 100	60 - 100
Rotation Pmax	bar	150	150	150
Flow	l/min	20 - 50	20 - 50	20 - 50

*Depending of capacity of carrier **Weight excluding bracket

Subject to change without notice.

TRENDSETTER IN DEMOLITION AND RECYCLING EQUIPMENT



demarec.com

Demolition and Recycling Equipment B.V., De Hork 32 - 5431 NS Cuijk - The Netherlands ☎ +31 (0)485 442300 - info@demarec.com