


The new universal Concrete Buster: less weight, more power

- › Made for cracking foundation walls with a thickness of up to 900 mm
- › CB 2500 comes with the maximum jaw opening of its class: 1,100 mm
- › Cracking force of 100 tons

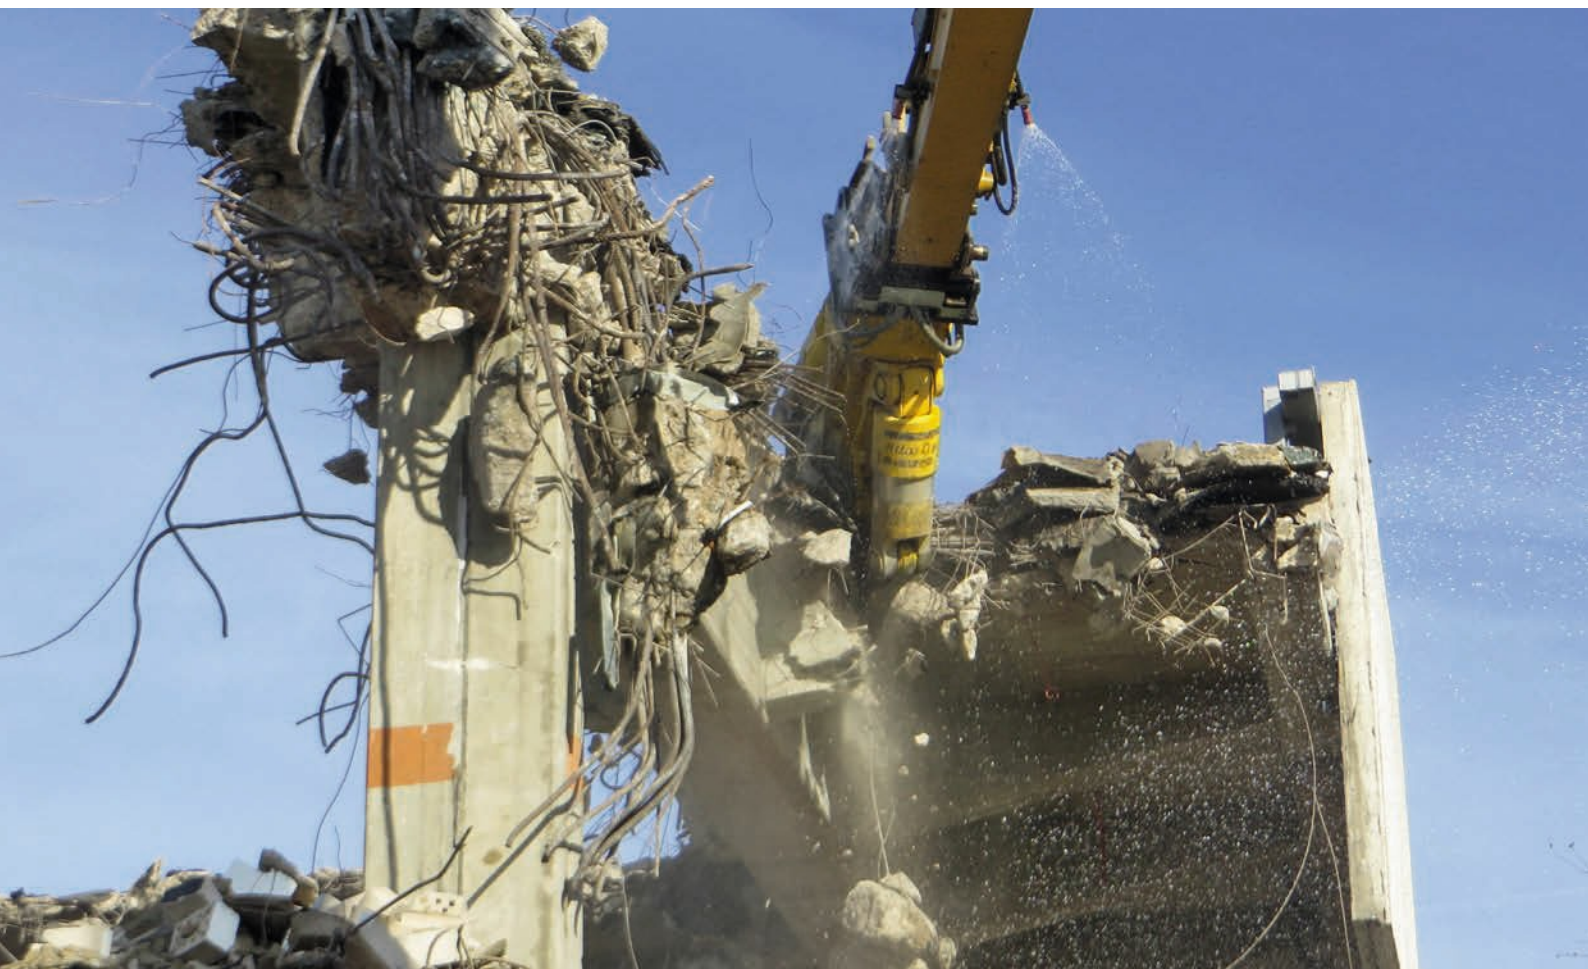

Light-duty Concrete Busters

The simple, solid design of our CB 350, CB 750 and CB 950 models makes them not only very light, but also extremely rugged and dependable.

They are ideal for attachment to miniexcavators and simple to use.

CB 2500

IDEAL FOR HIGH REACH OR LONG FRONT CARRIERS

› With the low weight of 2,580 kg ideal for cracking girder and heavy concrete in extreme height

PRIMARY CRACKING WHEN NOISE IS AN ISSUE

› Can be used in residential areas where hydraulic breakers are not permitted

CB 2500

360 degrees rotation

Our concrete buster comes with a full rotation device that supports easy positioning and handling.

Double pin system

To allow the wide opening of the jaw – 1,100 mm – which makes it best in class.

Long blades

Blade length of 240 mm.

Two single jaws

Slim and easy to manoeuver, even in extreme heights.



CONCRETE BUSTERS		CB 350	CB 750	CB 950	CB 2500
Carrier weight	t	2–8	7–14	12–20	20–35
Service weight	kg	320	730	940	2,600
Delivery weight	kg	290	617	794	2,370
Crushing force – jaw tip	t	40	45	55	100
Length	mm	907	1,374	1,700	2,260
Width	mm	752	752	1,039	1,560
Depth	mm	360	540	540	690
Jaw opening	mm	380	480	680	1,100
Jaw depth	mm	219	269	324	750
Cutting blade length	mm	90	140	140	240
Operating pressure	bar	300	350	350	350
Oil flow	l/min	50–90	90–180	90–180	250